


Stacks

- the behaviour of stack methods are to:
 - push to the top of a stack
 - remove from the top of a stack, via pop

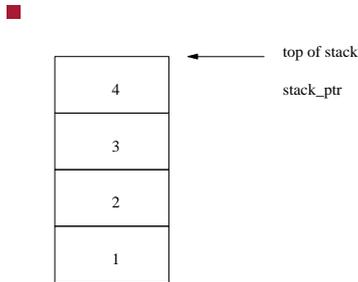

Stacks

- here we have

```
push(1)
push(2)
push(3)
push(4)
```


- and then executing

```
i = pop()
```

- yields the value 4 in i

Stacks

- and the stack now looks like this:



- we note that stacks and lists are isomorphic

Stacks

- for example if we needed a stack of integers we could use our lecture 2 implementation of a single linked list

- push(i) is equivalent to `l.cons(i)`

- `i = pop()` is equivalent to `i = l.head(); l = tail();`

- we might be tempted to conclude here :-)
 - however stacks are often used right at the center of many systems and performance can be critical

Stacks

- it should be noted that the operations push and pop are expected to be used very frequently

Stack definition

- `examples/c++/stacks/int/v1/stack.h`

```
class element
{
public:
    element *next;
    int     data;
};

class stack
{
private:
    element *head_element;
    element *duplicate_elements (element *e);
    element *delete_elements (void);
    friend std::ostream& operator<< (std::ostream& os, cons
```

Stack definition

- `examples/c++/stacks/int/v1/stack.h`

```
public:
    stack (void);
    ~stack (void);
    stack (const stack &from);
    stack& operator= (const stack &from);

    stack empty (void);
    bool is_empty (void);
    stack push (int i);
    int top (void);
    int pop (void);
};
```

Stack definition

- notice its similarity to the single linked list class

Stack definition

examples/c++/stacks/int/v1/stack.cc

```

/*
 * push - push i to stack.
 *       pre-condition:  none.
 *       post-condition: returns the stack which has i
 *                       and the remainder of contents.
 */

stack stack::push (int i)
{
    element *e = new element;

    e->data = i;
    e->next = head_element;
    head_element = e;
    return *this;
}

```

Stack definition

examples/c++/stacks/int/v1/stack.cc

```

/*
 * pop - opposite of cons. Remove the head value and return it.
 *       pre-condition:  non empty stack.
 *       post-condition: remove and return value from top of stack.
 */

int stack::pop (void)
{
    element *e = head_element;
    int value = e->data;

    assert (! is_empty());
    head_element = head_element->next;
    if (debugging)
        printf ("wanting to delete 0x%p, e);
    else
        delete e;
    return value;
}

```

Version 2: Stack

- notice that if push and pop are used many times when we will have many calls to new and delete
 - these last two functions may be very costly, as they are generic for any data type
 - probably using complex memory management algorithms
- given that push and pop occur so frequently we will maintain our own free list

Version 2: Stack

examples/c++/stacks/int/v2/stack.h

```

class stack
{
private:
    element *head_element;
    element *free_list;
    element *duplicate_elements (element *e);
    element *delete_elements (element *h);
    friend std::ostream& operator<< (std::ostream& os, const stack& s);
    element *new_element (void);
    void delete_element (element *e);
}

```

Version 2: Stack

examples/c++/stacks/int/v2/stack.h

```
public:
stack (void);
~stack (void);
stack (const stack &from);
stack& operator= (const stack &from);

stack empty (void);
bool is_empty (void);
stack push (int i);
int top (void);
int pop (void);
};
```

Version 2: Stack

examples/c++/stacks/int/v2/stack.cc

```
/*
 * delete_elements - delete all elements of stack.
 * pre-condition : none.
 * post-condition: all elements are deleted
 * and zero is returned.
 */
element *stack::delete_elements (element *h)
{
while (h != 0) {
element *t = h;
h = h->next;
if (debugging)
printf ("wanting to delete 0x%p\n", t);
else
delete t;
}
return 0;
}
```

Version 2: Stack

examples/c++/stacks/int/v2/stack.cc

```
/*
 * delete_element - pre-condition : e, must not be on the
 * post-condition: places, e, onto the
 */
void stack::delete_element (element *e)
{
e->next = free_list;
free_list = e;
}
```

Version 2: Stack

examples/c++/stacks/int/v2/stack.cc

```
/*
 * new_element - pre-condition : none.
 * post-condition: return an element either
 * from the free_list or from the h
 */
element *stack::new_element (void)
{
element *e;

if (free_list == 0)
e = new element;
else
{
e = free_list;
free_list = free_list->next;
}
return e;
}
```

Version 2: Stack

examples/c++/stacks/int/v2/stack.cc

```

/*
 * push - push i to stack.
 *       pre-condition:  none.
 *       post-condition: returns the stack which has i
 *                       and the remainder of contents.
 */

stack stack::push (int i)
{
    element *e = new_element ();

    e->data = i;
    e->next = head_element;
    head_element = e;
    return *this;
}

```

Version 2: Stack

examples/c++/stacks/int/v2/stack.cc

```

/*
 * pop - opposite of cons. Remove the head value and return it.
 *       pre-condition:  non empty stack.
 *       post-condition: remove and return value from top of stack.
 */

int stack::pop (void)
{
    element *e = head_element;
    int value = e->data;

    assert (! is_empty());
    head_element = head_element->next;
    if (debugging)
        printf ("wanting to delete 0x%p\n", e);
    else
        delete_element (e);
    return value;
}

```

Version 2: destructor

examples/c++/stacks/int/v2/stack.cc

```

/*
 * ~stack - destructor, releases the memory attached.
 *       pre-condition:  none.
 *       post-condition: stack is empty.
 */

stack::~stack (void)
{
    head_element = delete_elements (head_element);
    free_list = delete_elements (free_list);
}

```

Version 2: copy

examples/c++/stacks/int/v2/stack.cc

```

/*
 * copy operator - redefine the copy operator.
 *       pre-condition : a stack.
 *       post-condition: a copy of the stack.
 */

stack::stack (const stack &from)
{
    head_element = duplicate_elements (from.head_element);
    free_list = 0;
}

```

Version 2: assignment

examples/c++/stacks/int/v2/stack.cc

```

/*
 * operator= - redefine the assignment operator.
 *             pre-condition : a stack.
 *             post-condition: a copy of the stack and its elements.
 *             We delete 'this' stacks elements.
 */

stack& stack::operator= (const stack &from)
{
    if (this->head_element == from.head_element)
        return *this;

    head_element = delete_elements (head_element);
    head_element = duplicate_elements (from.head_element);
    free_list = 0;
}

```

Version 2: constructor

examples/c++/stacks/int/v2/stack.cc

```

/*
 * stack - constructor, builds an empty stack.
 *             pre-condition: none.
 *             post-condition: stack is created and is empty.
 *             free_list is empty.
 */

stack::stack (void)
    : head_element(0), free_list(0)
{
}

```